Matera CGS VLBI Station 2014 Annual Report

Giuseppe Bianco ¹, Giuseppe Colucci ², Francesco Schiavone ²

Abstract This report presents the status of the Matera VLBI station. An overview of the station, some technical characteristics of the system, and staff addresses are also given.

1 General Information

The Matera VLBI station is located at the Italian Space Agency's 'Centro di Geodesia Spaziale G. Colombo' (CGS) near Matera, a small town in the south of Italy. The CGS came into operation in 1983 when the Satellite Laser Ranging SAO-1 System was installed. Fully integrated into the worldwide network, SAO-1 was in continuous operation from 1983 up to 2000, providing high precision ranging observations of several satellites. The new Matera Laser Ranging Observatory (MLRO), one of the most advanced Satellite and Lunar Laser Ranging facilities in the world, was installed in 2002, replacing the old SLR system. CGS also hosted mobile SLR systems MTLRS (Holland/Germany) and TLRS-1 (NASA).

In May 1990, the CGS extended its capabilities to Very Long Baseline Interferometry (VLBI), installing a 20-m radio telescope. Since then, Matera has observed in 982 sessions up through December 2014.

In 1991 we started GPS activities, participating in the GIG 91 experiment and installing at Matera a permanent GPS Rogue receiver. In 1994, six TurboRogue SNR 8100 receivers were purchased in

order to create the Italian Space Agency GPS fiducial network (IGFN). At the moment 12 stations are part of the IGFN, and all data from these stations, together with 24 other stations in Italy, are archived and made available by the CGS Web server GeoDAF (http://geodaf.mt.asi.it).

In 2000, we started activities with an Absolute Gravimeter (FG5 Micro-G Solutions). The gravimeter operates routinely at CGS and is available for external campaigns on request.

Thanks to the co-location of all precise positioning space-based techniques (VLBI, SLR, LLR, and GPS) and the Absolute Gravimeter, CGS is one of the few "fundamental" stations in the world. With the objective of exploiting the maximum integration in the field of Earth observations, in the late 1980s, ASI extended CGS' involvement to include remote sensing activities for present and future missions (ERS-1, ERS-2, X-SAR/SIR-C, SRTM, ENVISAT, and COSMO-SkyMed).

The Matera VLBI antenna is a 20-meter dish with a Cassegrain configuration and an AZ-EL mount. The AZ axis has ± 270 degrees of available motion. The slewing velocity is 2 deg/sec for both the AZ and the EL axes.

The technical parameters of the Matera VLBI antenna are summarized in Table 1.

The Matera time and frequency system consists of three frequency sources (two Cesium beam and one H-maser standard) and three independent clock chains. The iMaser 3000 H-maser from Oscilloquartz is used as a frequency source for VLBI.

Matera Network Station

IVS 2014 Annual Report

^{1.} Agenzia Spaziale Italiana

^{2.} e-geos - an ASI/Telespazio company

80 Bianco et al.



Fig. 1 VLBI antenna.

Table 1 Matera antenna technical specification.

Values (S/X)
2210-2450 MHz / 8180-8980 MHz
<20 K
190-430 MHz
100-900 MHz
0.0 dBm to +8.0 dBm
<1 dB at +8 dBm output level
>45 dB within the IF passband
At least 30 dB below each of two carriers
at an IF output level of 0 dBm per carrier
55/65 K
800/900 Jy

2 Activities during the Past Year

The VLBI frequency standard is a T4SCIENCE iMaser 3000 installed in 2013.

Specifications for this new maser can be found here: http://www.t4science.com/product/imaser_3000.

3 Current Status

In 2014, 53 sessions were observed. Figure 2 shows a summary of the total acquisitions per year, starting in 1990.

CGS/Matera 2014 Report 81

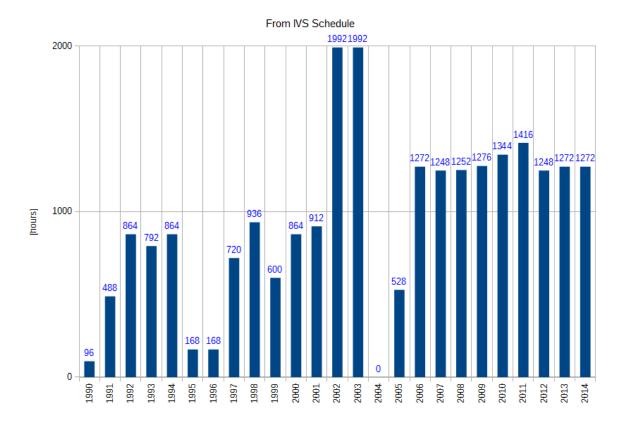


Fig. 2 Observation time.

In 2004, in order to fix the existing rail problems, a complete rail replacement was planned. In 2005, due to financial difficulties, it was instead decided that only the concrete pedestal under the existing rail would be repaired. From then on, no rail movements have been noted [1]-[3].

4 Future Plans

In order to plan the eventual building of a VLBI2010 system, the fund raising investigation process has begun. At this moment it is not clear when the budget for starting the project will be ready.

References

- M. Mannarella "Relazione sulle misure effettuate sulla rotaia dell'antenna VLBI", Telespazio doc. OT-SPA-SM_REL_180010_1140_0222, 21/01/2004.
- M. Mannarella "Misure sugli spostamenti indotti sulle piastre e sulla rotaia dell'antenna VLBI", Telespazio doc. OT-SPA-SM_REL_180010_1320_0661, 06/04/2005.
- M. Mannarella "Relazione sull'esito dei lavori di ripristino delle parti ammalorate della fondazione dell'antenna VLBI", Telespazio Doc. OT-SPA-SM_REL_180010_1320_0732, 27/06/2005.